


How to install:

- 1: Remove air box from bike
- 2: Remove the original air filter.
- 3: Remove the mesh side plate from the side of the air box.
- 4: Place green layer between the mesh and the plastic housing.
- 5: Slide red layer in the slot the original air filter slotted into.
- 6: Re-fit side plate to air box and re-install air box to the bike
- 7: The bike is now ready to ride.

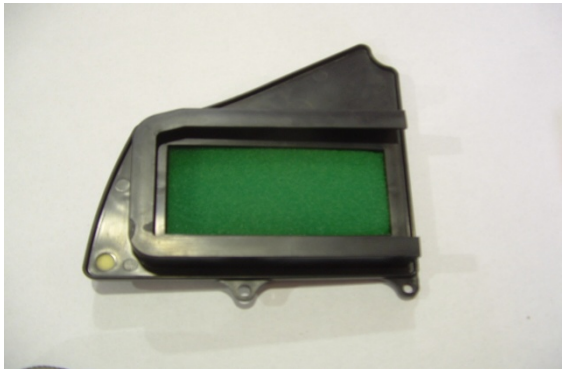

Filter needs to be oiled before use.